


STAINLESS STEEL MOUNTED UNITS

Insert bearing with locking screw (Suc) – LUBSOLID® compatible


Ref.	Shaft diameter (mm)	Dimensions (mm)					Tightening screw G	Basic loading rate x1000 Newtons		Weight (Kg)
		D	B	C	S	m		C Dynamic	C0 Static	
SUC201	12	47	31,0	17	12,7	5,0	M6x1	10,1	6,8	0,21
SUC202	15	47	31,0	17	12,7	5,0	M6x1	10,1	6,8	0,19
SUC203	17	47	31,0	17	12,7	5,0	M6x1	10,1	6,8	0,18
SUC204*	20	47	31,0	17	12,7	5,0	M6x1	10,1	6,8	0,16
SUC205*	25	52	34,1	17	14,3	5,0	M6x1	11,0	8,0	0,20
SUC206*	30	62	38,1	19	15,9	5,0	M6x1	15,3	11,5	0,32
SUC207*	35	72	42,9	20	17,5	6,0	M8x1	20,1	15,6	0,47
SUC208*	40	80	49,2	21	19,0	8,0	M8x1	22,8	18,2	0,63
SUC209	45	85	49,2	22	19,0	8,0	M10x1,25	25,7	20,8	0,69
SUC210	50	90	51,6	24	19,0	10,0	M10x1,25	27,5	23,7	0,77
SUC211	55	100	55,6	25	22,2	10,0	M10x1,25	34,0	25,5	1,06
SUC212	60	110	65,1	27	25,4	10,0	M10x1,25	41,0	31,5	1,47

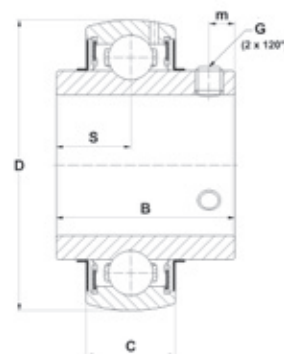

*References in bold indicate that inserts exist in LUBSOLID® version - suffix FG1.
These dimensions are also available in zinc-plated version ZUC, refer to our e-Shop for more information.


With SUCP sole

Ref.	Shaft diameter (mm)	Dimensions (mm)						Weight (Kg)
		L	H	H2	J	A	N	
SUCP201	12	126	33,3	65	95	38	13	0,91
SUCP202	15	126	33,3	65	95	38	13	0,89
SUCP203	17	126	33,3	65	95	38	13	0,88
SUCP204	20	126	33,3	65	95	38	13	0,86
SUCP205	25	140	36,5	70	105	38	13	1,00
SUCP206	30	165	42,9	83	121	48	17	1,62
SUCP207	35	167	47,6	94	127	48	17	1,97
SUCP208	40	184	49,2	100	136	54	17	2,33
SUCP209	45	190	54,0	109	146	54	17	2,69
SUCP210	50	206	57,2	114	159	60	20	3,27
SUCP211	55	219	63,5	126	171	60	20	4,16
SUCP212	60	241	69,8	138	184	70	20	5,67

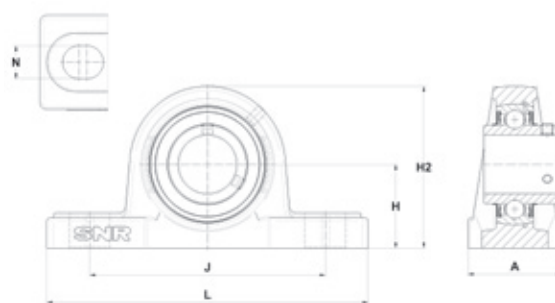

Flange bearing with 4 holes SUCF

Ref.	Shaft diameter (mm)	Dimensions (mm)					Weight (Kg)
		L	H2	J	A2	N	
SUCF201	12	86	-	64	33,3	12	0,61
SUCF202	15	86	-	64	33,3	12	0,59
SUCF203	17	86	-	64	33,3	12	0,58
SUCF204	20	86	-	64	33,3	12	0,56
SUCF205	25	95	-	70	35,8	12	0,80
SUCF206	30	108	-	83	40,2	12	1,12
SUCF207	35	116	-	92	44,4	14	1,37
SUCF208	40	130	-	102	51,2	16	1,83
SUCF209	45	137	-	105	52,2	16	2,29
SUCF210	50	143	-	111	54,6	16	2,57
SUCF211	55	162	-	130	58,4	19	4,06
SUCF212	60	175	-	143	68,7	19	5,47

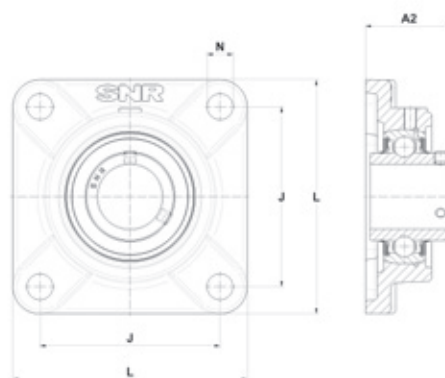

Bearing ranges are also available in inch sizes, refer to our e-Shop for more information.